



# "Uniqueness carefully explores the powerful expression of stone"



True is the most advanced evolution of ceramic stone. True to the original, in the richness of the tones, and surprisingly superior thanks to high technical standards in terms of resistance and durability. These qualities are made even more apparent thanks to the new big 18 "x36" size.




# "Unique sensations full of real emotion"

Surround yourself everyday with something really unique, with the pleasure of discovering authentic values that accompany our life.




??

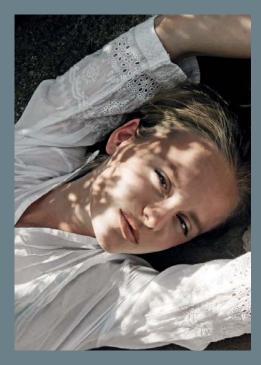

99

The space expands towards infinity that belongs only to those that recognize the shapes of true beauty.















Simple yet complex. A multi format installation highlights the graphical variability and the softness of the structures that mirror the stone from which they draw inspiration.

Light Beige 12"x24"\_12"x12" - 30x60.4\_30x30 cm - Mosaic 12"x12" - 30x30 cm



??







99

The intimate spaces are clad with a natural touch in the deep colors of the surfaces that create an atmosphere of freshness and well-being.



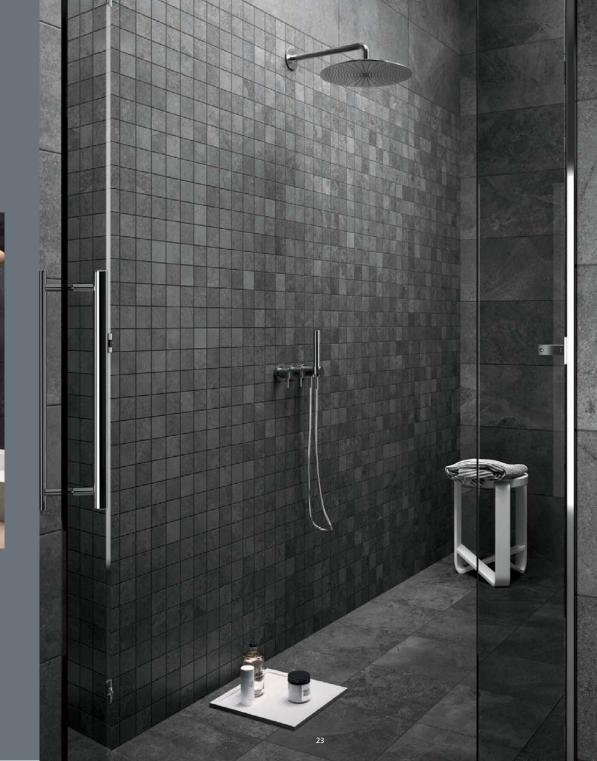



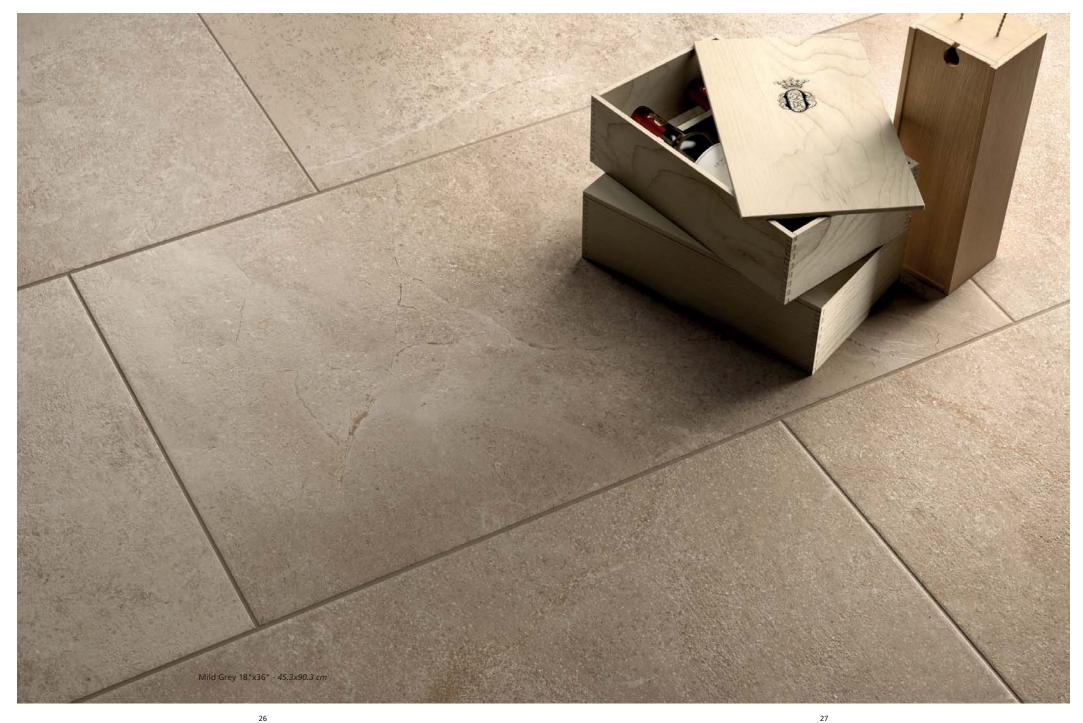



??




99

In the strength of stone every emotion is amplified and reinforced, with the certainty that only nature can give us new energy to design with personality our spaces.

Mild Grey 18"x36" rect. - 45x90 cm rect.



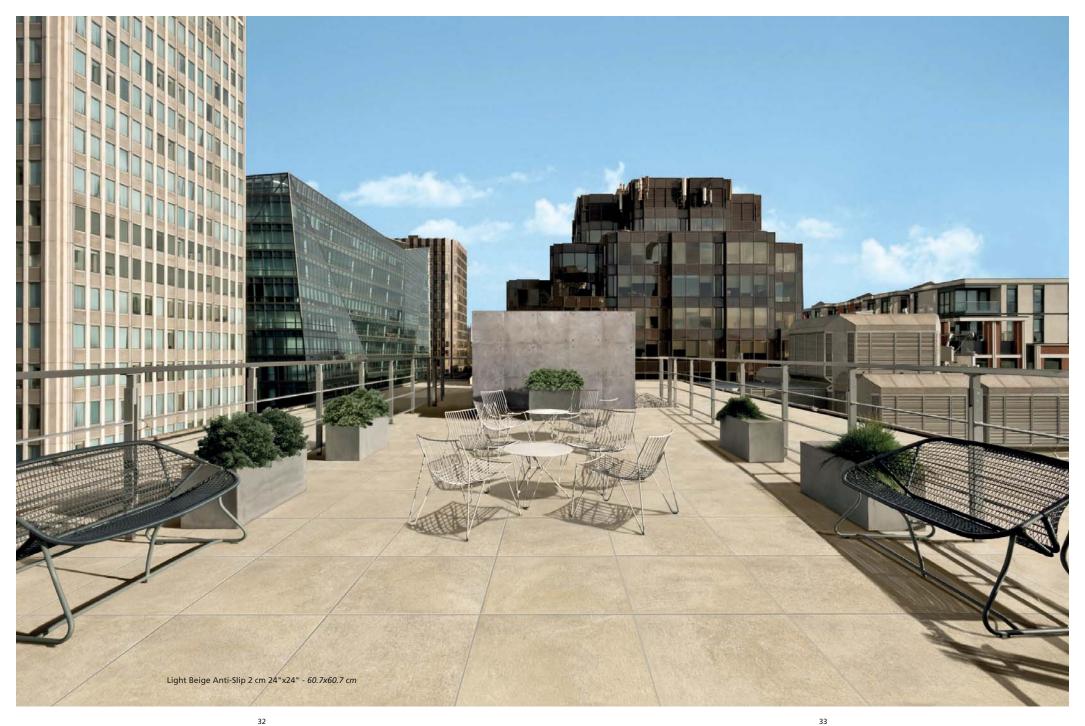

# True

# WARM WHITE

**±** 10 mm **‡**9 mm 18"x36" 45.3x90.3 cm 18"x18" 45.2x45.2 cm 18"x36" RECT 45x90 cm



# 2 CM



24"x24" ANTI-SLIP 60.7x60.7 cm

# LIGHT BEIGE



🛨 10 mm **‡**9 mm 18"x36" 45.3x90.3 cm 18"x18" 45.2x45.2 cm 18"x36" RECT 45x90 cm

**‡**9 mm 12"x24" 30x60.4 cm

**‡**9 mm 12"x12" 30x30 cm



**±**2 cm 24"x24" ANTI-SLIP 60.7x60.7 cm

# True

MILD GREY




**±** 10 mm **+**9 mm 18"x36" 45.3x90.3 cm 18"x18" 45.2x45.2 cm 18"x36" RECT 45x90 cm





# SOFT BLACK



± 10 mm **‡**9 mm 18"x36" 45.3x90.3 cm 18"x18" 45.2x45.2 cm 18"x36" RECT 45x90 cm





24"x24" ANTI-SLIP 60.7x60.7 cm

# True

# **DECOS** ₹9 mm

# WARM WHITE



MOSAIC 25 PCS. 12"x12" 30x30 cm

# LIGHT BEIGE



MOSAIC 25 PCS. 12"x12" 30x30 cm

# MILD GREY



MOSAIC 25 PCS. 12"x12" 30x30 cm

# SOFT BLACK



MOSAIC 25 PCS 12 "x12 " 30x30 cm

# **TRIM PIECES** ≠ 9 mm




BULLNOSE 3<sup>1/8</sup>"x12" 8x30 cm All colors available



COVE BASE 6"x12" 15x30 cm All colors available

# 

TRIM PIECES 20 mm: only full boxes sold, manufactured only upon special request, 30 days delivery.

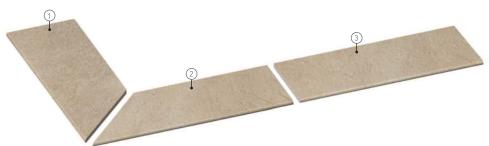

36

1 - POOL COPING 45 ANGLE L 12"x24"RECT ANTI-SLIP 30x60 cm Colors available: Warm White - Light Beige - Mild Grey

2 - POOL COPING 45 ANGLE R 12"x24"RECT ANTI-SLIP 30x60 cm Colors available: Warm White - Light Beige - Mild Grey

3 - POOL COPING 12 "x24" RECT ANTI-SLIP 30x60 cm Colors available: Warm White - Light Beige - Mild Grey

# True

# **PACKAGING**

SIZES	SF / CTN	LINEAR FT / CTN	PIECES / CTN	CTN / PALLET	SF / PALLET	LBS / CTN	LBS / PALLET
18"X36"	13.45	-	3	28	376.60	62.61	1,753.08
18"X36" RECT	13.13	-	3	28	367.64	60.63	1,697.64
18"X18"	15.61	-	7	32	499.52	68.3	2,185.6
24"X24" ANTI-SLIP 2cm	8.03	-	2	32	256.96	73.85	2,363.2
12"X24"	13.89	-	7	32	444.48	64.6	2,067.2
12"X12"	10.87	-	11	64	695.68	48.5	3,104.0
MOSAIC 12"X12" (25 PCS)	3.87	-	4	90	348.3	16.53	1,487.7
BULLNOSE 31/8"X12"	5.17	19.7	20	112	579.04	19.8	2,217.6
COVE BASE 6"X12"	3.87	-	8	108	417.9	16.5	1,782.0
POOL COPING 12"X24"	1.94	-	1	100	193.75	17.91	1,791.23
POOL COPING 45 ANGLE L 12"X24"	1.45	-	1	100	145.31	13.45	1,344.80
POOL COPING 45 ANGLE R 12"X24"	1.45	-	1	100	145.31	13.45	1,344.80

# **TECHNICAL FEATURES**

COLOURED-BODY GLAZED STONEWARE ACCORDING TO ANSI A137.1 (GLAZED PORCELAIN TILES - P1 CLASS)

	TECHNICAL FEATURES	TEST METHOD	ANSI A137.1 REQUIRED VALUES	SERIES AVERAGE VALUES	
(F)	WATER ABSORPTION	ASTM C373	≤ 0.5%	CONFORMS	
1	BREAKING STRENGTH	ASTM C648	≥ 250 lbf	350 lbf 9 mm 425 lbf 10 mm 2,800 lbf 2 cm	
PEI	RESISTANCE TO SURFACE ABRASION	ASTM C1027	AS INDICATED BY MANUFACTURER	5: WARM WHITE, LIGHT BEIGE, MILD GREY 4: SOFT BLACK	
	CHEMICAL RESISTANCE	ASTM C650	AS INDICATED BY MANUFACTURER	A RESISTANT (*)	
<b>*</b>	STAIN RESISTANCE	ASTM C1378	AS INDICATED BY MANUFACTURER	A RESISTANT	
	LINEAR THERMAL EXPANSION	ASTM C372	NO PROVISION	$\alpha \le 8 \text{ X } 10^{-6}  {}^{\circ}\text{C}^{-1}$ $\alpha \le 4.4 \text{ X } 10^{-6}  {}^{\circ}\text{F}^{-1}$	
*	FROST RESISTANCE	ASTM C1026	AS INDICATED BY MANUFACTURER	RESISTANT	
	BOND STRENGHT	ASTM C482	≥ 50 PSI	CONFORMS	
	FLAME SPREAD	ASTM E84	-	Class A	
	SHADE VARIATION	ANSI A137.1	AS INDICATED BY MANUFACTURER	V2 (Slight variation)	
	SLIP RESISTANCE	DIN 51130	-	<b>R11</b> 2 cm	
		DIN 51097	-	<b>C (A+B+C)</b> 2 cm	
		ANSI A137.1 BOT 3000	DCOF ≥ 0.42	≥ <b>0.50</b> 9 / 10 mm ≥ <b>0.62</b> 2 cm	
	RECOMMENDED MINIMUM JOINT	RECT	-	2 mm (Indoor)	
		NOT RECT	-	3-4 mm APPROX (Indoor)	
		OUTDOOR	-	5-6 mm APPROX	
<b>1</b>	THICKNESS	18"X18" - 45.2X45.2 cm SIZES 12"X24" - 30X60.4 cm 12"X12" - 30X30 cm	-	9 mm	
		SIZES 18"X36" - 45X90 cm 18"X36" - 45.3X90.3 cm	-	10 mm	
		SIZES 24"X24" - 60.7X60.7 cm	=	2 cm	

37

<sup>(\*)</sup> No Hydrofluoric acid and its derivatives

## **CERTIFICATIONS**



















GREENGUARD CERTIFICATION Panaria True in a production plan "gold" certified by

Product designed in Italy

## PANARIA TRUE SERIES AND THE ENVIRONMENT



## 100% REUSE OF UNFIRED TILES

Crude waste generated by the process is reintegrated in the production cycle with no costs for the environment. This contributes to the safeguard of natural resources.



### 100% REUSE/RECYCLING OF THE INDUSTRIAL WASTE - FIRED TILES

The waste-fired tiles are fully reused in the production cycle. In addition, at the end of life, the Panaria tiles can be recycled as materials for substrates for roads and buildings, thus reducing the use of gravel and natural aggregates commonly used in building.



# 100% WATER RECYCLING

The water used in the production process is 100% recycled. The water demand is strongly reduced by this mean. No industrial water is discharged in the ecosystem.



# PANARIA PACKING MATERIAL IS 100% RECYCLABLE

(carton boxes, plastic packaging materials, wooden pallets, straps, etc.).



### 100% OF NON CERAMIC WASTE

Is differentiated and recycled in other production cycles.



### LOW EMISSIONS IN THE ATMOSPHERE

Panaria production plant strictly complies to US Standards with a very small amount of gas emissions in the atmosphere.



### SAFETY REQUIREMENTS: NO FIRE REACTION

All of Panaria's ceramic tile products are Class A building materials as described in ASTM E84 - Standard Test Method for Surface Burning Characteristics of Building Materials. This is due to the flame spread rating of (O) and smoke developed rating of (O) falling within the ranges of a Class A material. Other building codes refer to this as a Type I material in accordance with NFPA 255.



# SAFETY REQUIREMENTS: DCOF ≥ 0.42

Panaria TRUE series has got a Dynamic Coefficient Of Friction ≥ 0.42, as requested by ANSI A137.1 "For level interior spaces expected to be walked upon when wet".



# METHANE CONSUMPTION IS HIGHLY REDUCED

By the use of up to date technologies and customized installations.



Follow us on



February 2017



Via Panaria Bassa, 22/a 41034 Finale Emilia (Modena) - Italy Tel. +39 0535 95111 - Fax +39 0535 90503 info@panaria.it - www.panaria.it