CHIMEWOOD

The Chimewood Collection is our signature luxury SPC vinyl tile flooring that features authentic design, natural color, and realistic texture that recreates the beauty of real hardwood.




CHIMEWOOD SPC/VINYL FLOORING

olympiatile+stone !!

www.olympiatile.com

7" X 48" Matte

LIGHT BROWN

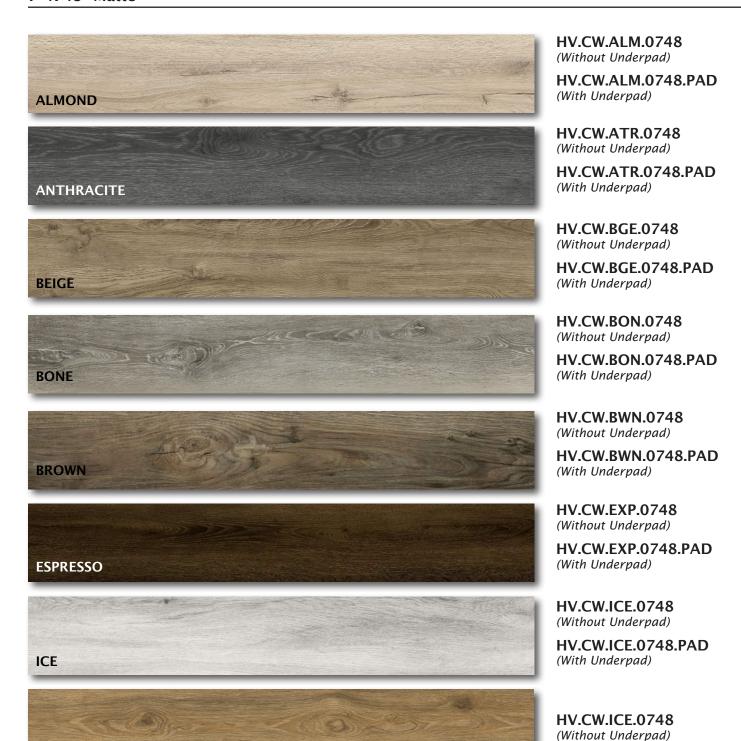

CHIMEWOOD

SPC/VINYL FLOORING

olympiatile+stone www.olympiatile.com

7" X 48" Matte



Packing Details (Sold per BOX)

TILE SIZE	PC/BOX	SF/BOX	LB/BOX	BOX/PAL	SF/PALLET
7" x 48"	11	26.19	44.11	55	1,440.45sf

- Chimewood's stone plastic composite core resists indentations and eliminates telegraphing for all Home, Office & Commercial settings.
- Chimewood is Floorscore certified for low VOC providing an environmentally friendly option for flooring applications both commercial & residential.
- Chimewood features a unilin clickhinge to ensure a seamless water proof installation.

Actual photo of SPC backing without IXPE underpad

Thickness: 4mm

Actual photo of SPC backing with IXPE underpad

Thickness: 5mm

olympiatile+stone

www.olympiatile.com

SPC/VINYL TRIMS (BULLNOSE)					
COLOURS	Vinyl Reducer 106.3" x 1 .1" (Thickness: 5 mm)	Vinyl TBAR 106.3" x 0.98" (Thickness: 3 mm)	Vinyl Nosing 106.3" x 0.94" (Thickness: 5.5 mm)		
(Please contact	REDUCER (PHM) 28x5mm PVC	T-BAR (PSPAI) 25x3mm PVC	STAIR NOSING (PFM) 25x5.5mm PVC		
your Sales Representative for samples.)	28mm	25mm	25mm		
Almond/Bone	HV.CW.AL/BO.REDUCER	HV.CW.AL/BO.TBAR	HV.CW.AL/BO.NOSING		
Anthracite	HV.CW.ANT.REDUCER	HV.CW.ANT.TBAR	HV.CW.ANT.NOSING		
Beige	HV.CW.BGE.REDUCER	HV.CW.BGE.RTBAR	HV.CW.BGE.NOSING		
Brown	HV.CW.BWN.REDUCER	HV.CW.BWN.RTBAR	HV.CW.BWN.NOSING		
Espresso	HV.CW.EXP.REDUCER	HV.CW.EXP.TBAR	HV.CW.EXP.NOSING		
Ice	HV.CW.ICE.REDUCER	HV.CW.ICE.TBAR	HV.CW.ICE.NOSING		
Light Brown	HV.CW.LBW.REDUCER	HV.CW.LBW.TBAR	HV.CW.LBW.NOSING		
Light Grey	HV.CW.LGR.REDUCER	HV.CW.LGR.TBAR	HV.CW.LGR.NOSING		
Light Taupe	HV.CW.LTP.REDUCER	HV.CW.LTP.TBAR	HV.CW.LTP.NOSING		
Silver	HV.CW.SIL.REDUCER	HV.CW.SIL.TBAR	HV.CW.SIL.NOSING		
Tan	HV.CW.TAN.REDUCER	HV.CW.TAN.TBAR	HV.CW.TAN.NOSING		
Taupe	HV.CW.TPE.REDUCER	HV.CW.TPE.TBAR	HV.CW.TPE.NOSING		



MAINTENANCE + INSTALLATION GUIDELINES


Available upon request.

TECHNICAL

RESULTS CONFORM

- 4mm Thick, 7" x 48" Without IXPE Underpad
- 5mm Thick, 7" x 48" With IXPE Underpad
- 20ml (.5mm) Wearlayer Double UV Coating - Installs Over Existing Hard Surface Flooring
- 2,000 + kg/m density core

SHADE VARIATION



V3 Moderate Variation

Plymouth, MN | 763.545.5455 • 800.288.3026 Des Moines, IA | 515.270.4920 • 800.320.1387 Omaha, NE | 402.614.9010 • 877.687.6636 katelotile.com

