



Borgo




Borgo

RECTIFIED IVORY BODY PORCELAIN TILE

COLORS & SIZES

LUCE



48" x 48"
Matte 1104606




24" x 48"
Matte Grip 1103776
1103780



2" x 2" (36 DOT) Mosaic
Matte 1103800



3" x 12" Bullnose
Matte 1103796




24" x 24" 2CM
Matte 1104070



12" x 24"
Matte 1103792

OMBRA



48" x 48"
Matte 1104608




24" x 48"
Matte Grip 1103778
1103782



2" x 2" (36 DOT) Mosaic
Matte 1103802



3" x 12" Bullnose
Matte 1103798




24" x 24" 2CM
Matte 1104072



12" x 24"
Matte 1103794

CALDO



48" x 48"
Matte 1104607



24" x 48"
Matte Grip 1103777
1103781



2" x 2" (36 DOT) Mosaic
Matte 1103801



3" x 12" Bullnose
Matte 1103797




24" x 24" 2CM
Matte 1104071



12" x 24"
Matte 1103793

BRONZO



48" x 48"
Matte 1104610



24" x 48"
Matte Grip 1103779
1103783



2" x 2" (36 DOT) Mosaic
Matte 1103803



3" x 12" Bullnose
Matte 1103799



24" x 24" 2CM
Matte 1104073



12" x 24"
Matte 1103795

Green Memberships & Accreditations




























Routine Care Instructions:




Colors shown may vary from actual product.
Final selection should be made from actual product samples.
Note: Sizes listed are nominal.



Backsplash: Borgo_2x2 Mosaic_Ombra_Matte
Floor: Borgo_12x24_Ombra_Matte

Borgo

Borgo is a transitional stone look tile suitable for both commercial and residential spaces. It's fresh take on a classic look brings new life to modern homes and commercial spaces both inside and out.

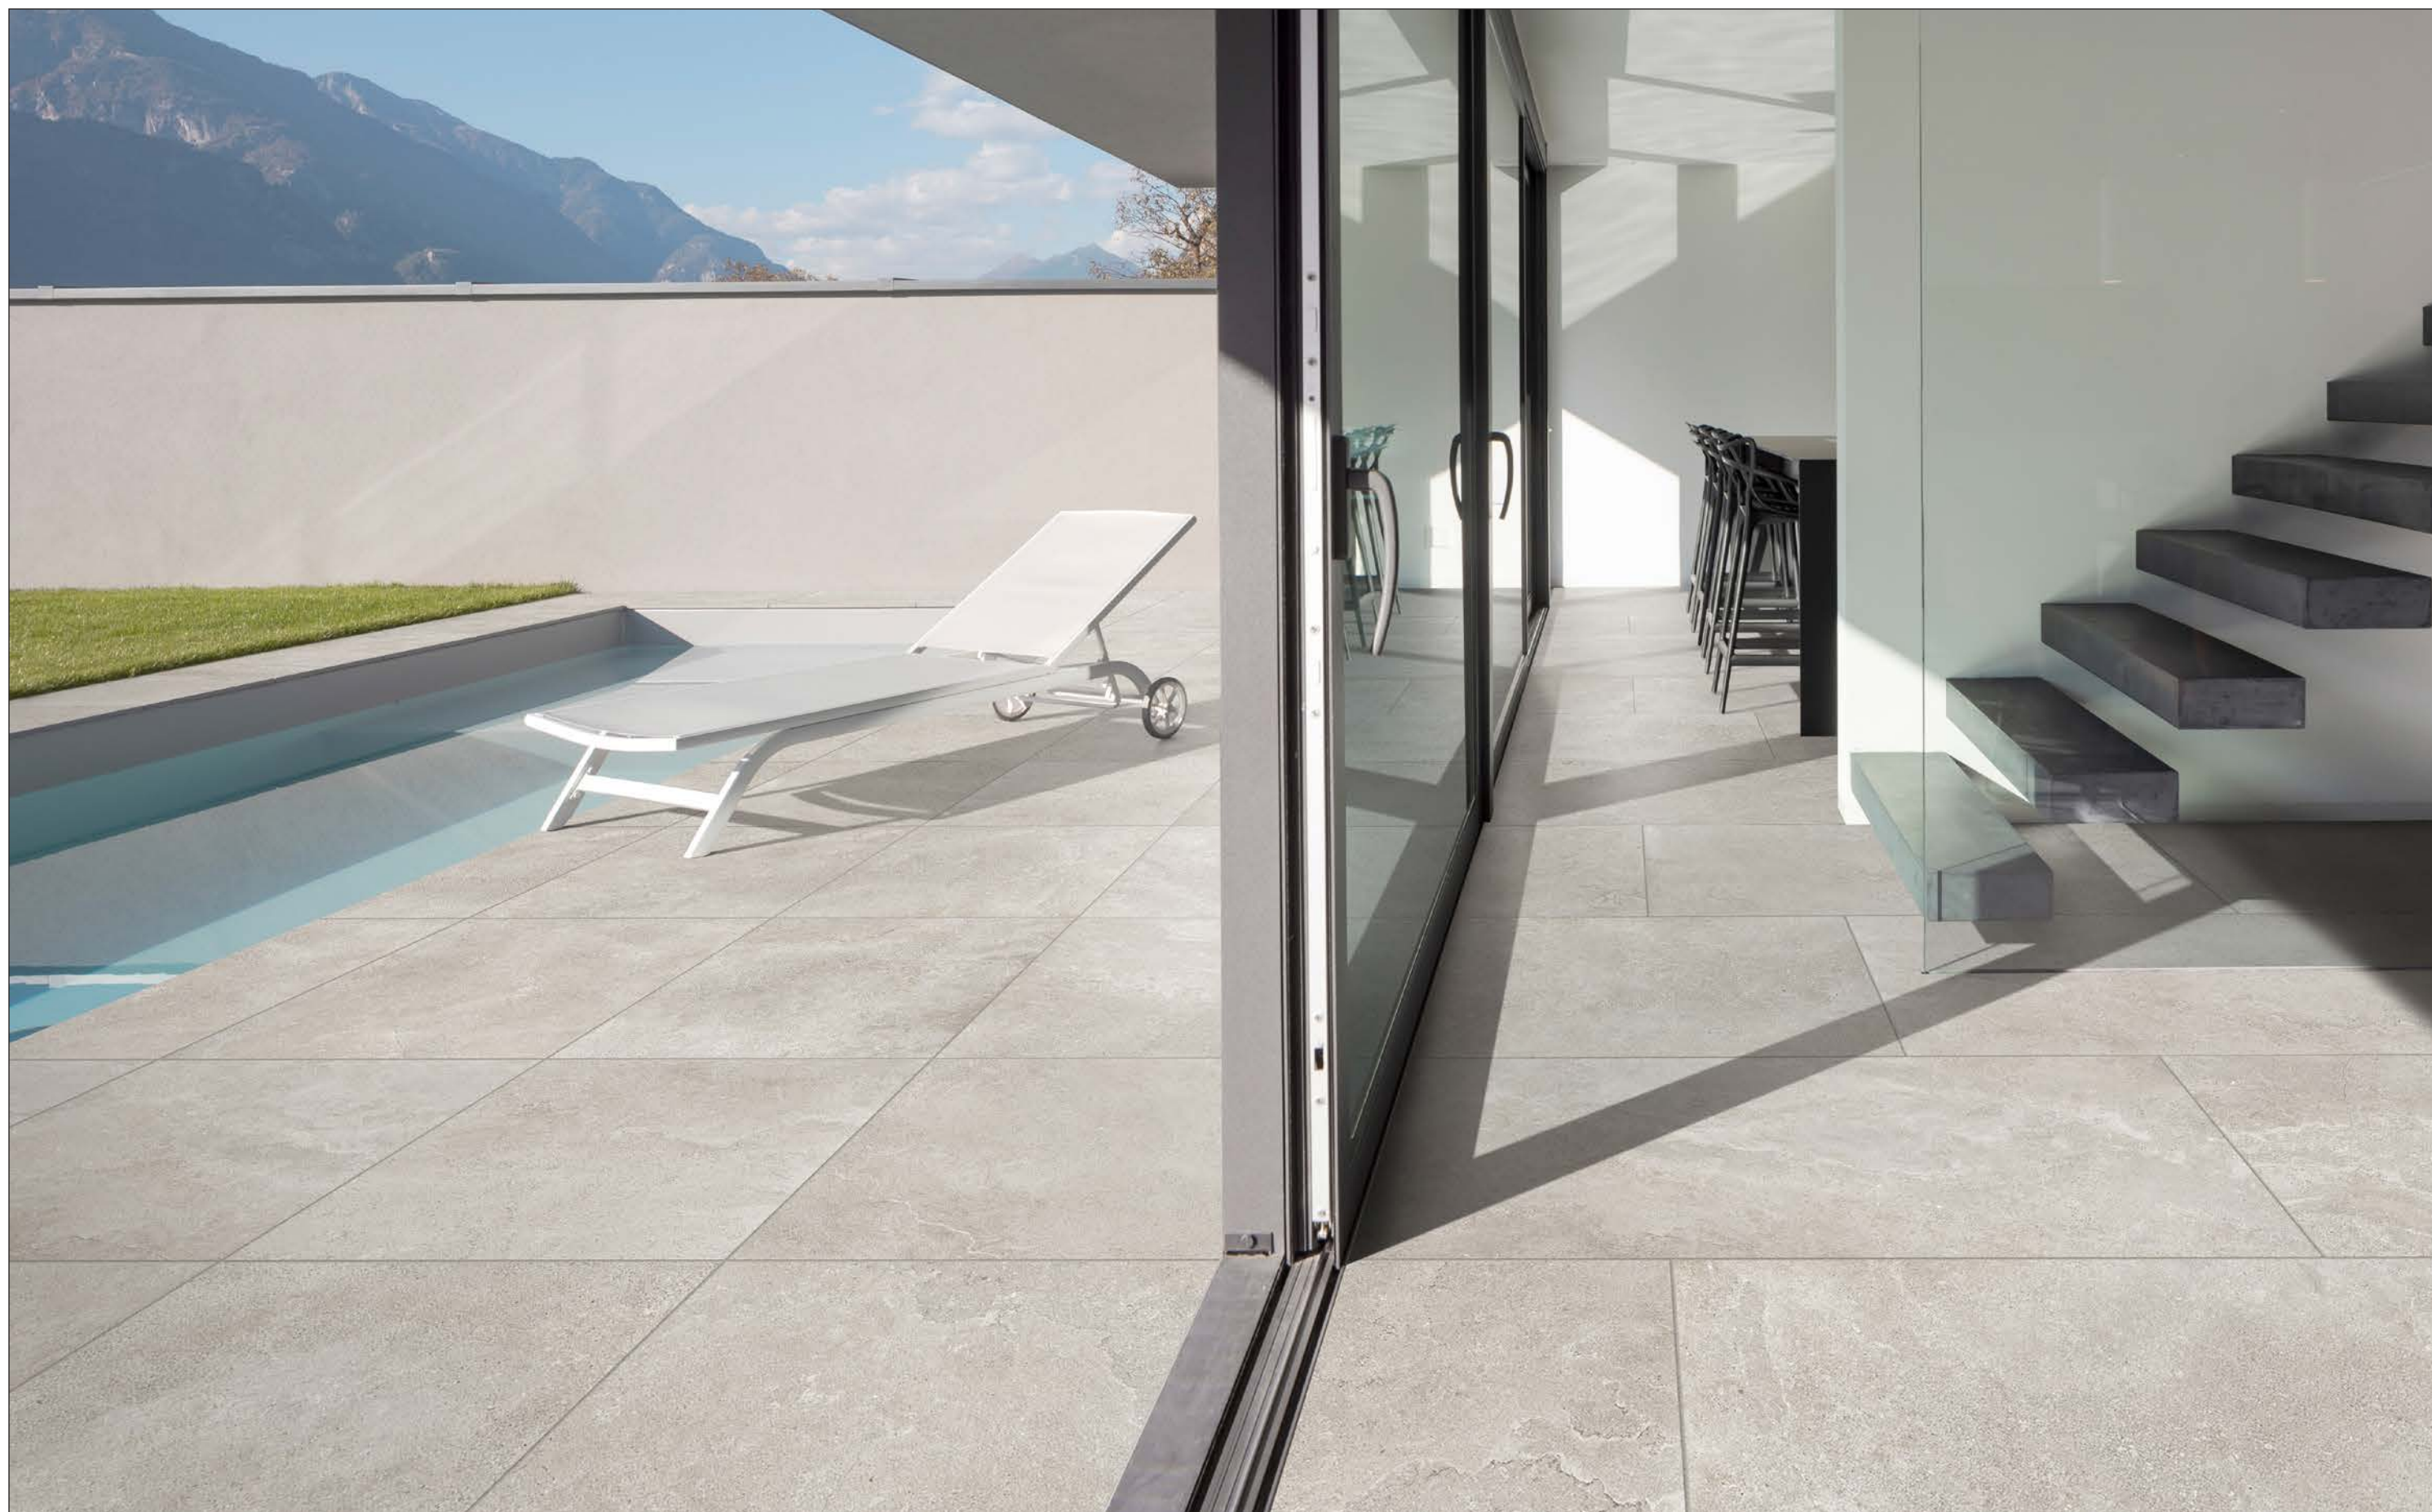

Indoor Floor: Borgo_24x48_Ombra_Matte
Outdoor Floor: Borgo_24x24 2CM_Ombra_Matte



Floor: Borgo_24x48_Bronzo_Matte



Wall: Borgo_12x24_2x2 Mosaic_Luce_Matte
Floor: Borgo_12x24_Luce_Matte
















Floor: Borgo_12x24_Caldo_Matte



Wall: Borgo_24x48_Luce_Matte
Floor: Borgo_24x48_Caldo_Matte

Technical Specifications

This product meets or exceeds all standards described in ANSI A137.1.

	SPECS	TEST METHOD	INDUSTRY STANDARD	MyHome VALUES	
	WATER ABSORPTION	ASTM C373	≤0.5%	≤0.4%	
	SURFACE WEAR RESISTANCE	ANSI A137.1	Surface Wear-resistance properties of glazed vitreous and porcelain tiles.	ALL RESIDENTIAL / COMMERCIAL	
	CHEMICAL RESISTANCE	ASTM C650	A tile sample is placed in continuous contact with a variety of chemicals for 24 hours. No sample must show visible defects.	NOT AFFECTED	
	D.C.O.F. AcuTest®	ANSI A326.3	≥0.42 WET	≥0.42 WET >0.55 WET 2CM	
	STAIN RESISTANCE	ASTM C1378	Surfaces are exposed to staining agents for 24 hours followed by four cleaning procedures. Results are recordedpost cleaning.	NOT AFFECTED	
	BREAKING STRENGTH GAUGED PORCELAIN	ASTM C1505	≥175 lbf	≥200 lbf	
	BREAKING STRENGTH	ASTM C648	≥275 lbf	≥300 lbf	
	BREAKING STRENGTH OUTDOOR 2CM	ASTM 1505	2000 lbf (10.9 kN)	≥2500 lbf	
	RESISTANCE TO FREEZE	ASTM C1026	A tile sample is subjected to repeated processes offreezing and thawing. Sample must show no visible defects.	RESISTANT	
	WARPAGE EDGE	ASTM C485	±0.40% or ±0.05 in (±1.8 mm)	± 0.40%	Rectified
	WARPAGE DIAGONAL	ASTM C485	±0.40% or ±0.07 in (±1.8 mm)	± 0.40%	Rectified
	WEDGING	ASTM C502	±0.25% or ±0.03 in (±0.8 mm)	± 0.25%	Rectified
	WARPAGE EDGE	ASTM C485	±0.50% or ±0.07 in (±1.8 mm)	± 0.50%	Calibrated
	WARPAGE DIAGONAL	ASTM C485	±0.50% or ±0.07 in (±1.8 mm)	± 0.50%	Calibrated
	WEDGING	ASTM C502	±0.50% or ±0.08 in (±2.0 mm)	± 0.50%	Calibrated
	THICKNESS	ASTM C499	Range: ± 0.04 in	≤0.04 in	

• Due to the inherent nature of fired porcelain tile, it is important to note that the coefficient of friction may vary within and between product runs.