



onyx unique

Portobello
America

onyx unique

Onyx is a limestone, also known as alabaster marble, which has as a main characteristic combining a thick and dense matter, quite opaque, with a crystalline and sheer translucent.

Onyx Unique interprets a rare version of such marble by using extremely clear tones punctuated by the transparency that defined organic drawings.





Onyx Unique **48x106 NAT RECT**





Onyx Unique **48x48 NAT RECT**





Onyx Unique **48x48 POL RECT**





Onyx Unique **24x48 POL RECT**





Onyx Unique **4x16 GLOSSY PRESSED**




Onyx Unique **4x16 MATTE PRESSED**




Onyx Unique **Scolpito 4x16 MATTE PRESSED**

Available Sizes
Formatos Disponibles


Small Formats / Wall Tile

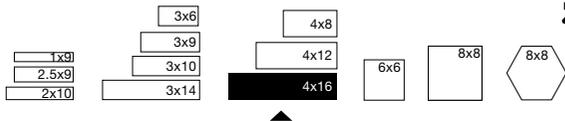


Special Pieces

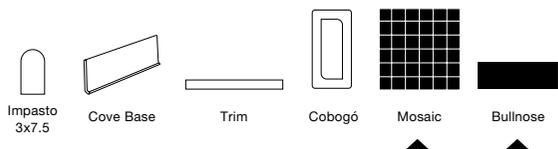

Large Format Wall Tile

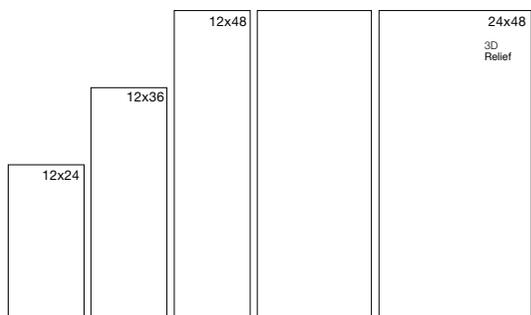

Porcelain Tiles

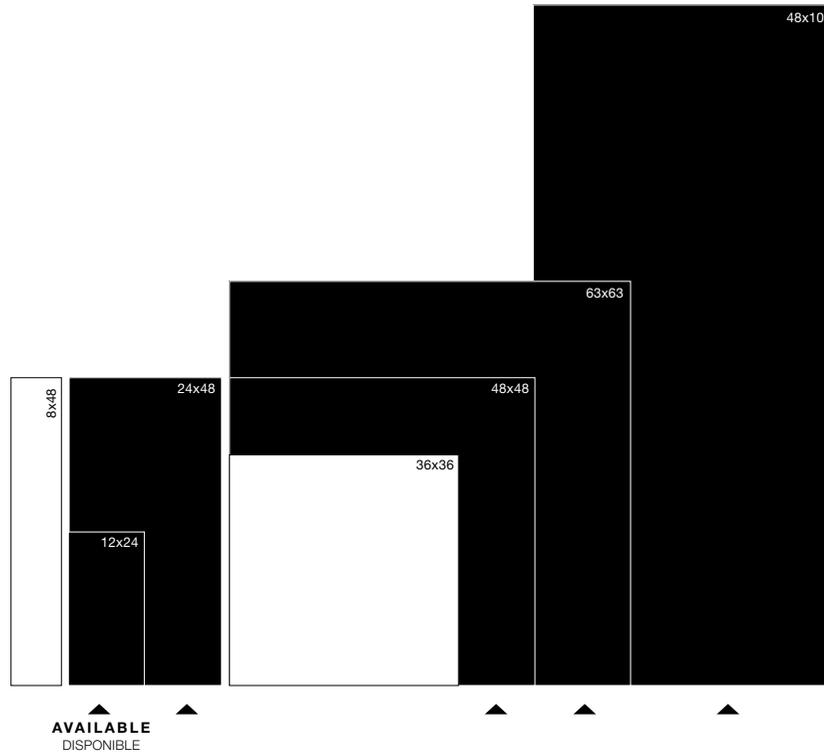

AVAILABLE
DISPONIBLE

onyx
unique

Available Edges
Bordes Disponibles

RECTIFIED
RECTIFICADO



PRESSED
PRENSADO



Available Finishes
Acabados Disponibles

POLISHED
PULIDO



MATTE
MATE



GLOSSY
BRILLANTE



EXTERIOR
EXTERIOR



3D RELIEF
RELIEVE 3D



onyx unique

Color Body Glazed Porcelain Tile | Glazed Ceramic Tile

Onyx Unique | V2



Mos Facets
1.5x1.5 | V2



Mos Goccia
1x4 | V2



Size	SKU	Finishes
Formato		Acabados
48x106	#200004E	NAT RECT
63x63	#203277E	NAT RECT
48x48	#205803E	NAT RECT
	#205872E	POL RECT
24x48	#900796E	NAT RECT
	#900771E	POL RECT
12x24	#900696E	NAT RECT
	#900759E	POL RECT
4X16	#900693E	MATTE PRESSED *
	#900694E	GLOSSY PRESSED *
4x16	#900695E	MATTE PRESSED *
Relief		
3x12	#80659ET	NAT RECT
Bullnose	#80660ET	POL RECT

Size	SKU	Finishes
Formato		Acabados
12x12	#80473ET	NAT
Mos Facets	#80639ET	POL
10x11	#80638ET	NAT
Goccia	#80641ET	POL



onyx unique

Color Body Glazed Porcelain Tile | Glazed Ceramic Tile

TECH DATA

 Finish	 Freeze Resistant	 Shade Variation	 Color Body	 Water Absorption	 Stain Resistant	 DCOF AcuTest	 Chemical Resistant	 Breaking Strength	 Mohs Hardness
NAT	Resistant	V2	√	≤ 0.5%	Class A	≥0.42	Class A	275 lbf	7
POL	Resistant	V2	√	≤ 0.5%	Class E	<0.42	Class E	≥275 lbf	5
24x48 RELIEF	Resistant	V2	N/A	≤ 0.5%	Class A	N/A	Class A	≥275 lbf	7
MATTE	N/A	V2	N/A	≤ 7%	Class A	≥0.42	Class A	≥250 lbf	7
GLOSSY	N/A	V2	N/A	≤ 7%	Class E	N/A	Class E	≥250 lbf	5

AREAS OF USAGE

Classification	Reference Category	Suitable
Interior, Dry	ID	√
Interior, Wet	IW	√ MATTE
Interior, Wet Plus	IW+	√
Exterior, Wet	EW	
Oils/Greases	O/G	

GROUT JOIN

The recommended grout joint:	
1/8" RECT	3/8" PRESSED

